



Dati Tecnici - Specifications

	cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	kg	Lbs	kg	Lbs	Ton CO2 equiv.
F80C A		702	400	10	12.5	3.2	53	117	60	132	0,43
F80C W		702	350	10	9.8	20	52	115	59	130	0,43



Produzione Ghiaccio - Ice Production (kg/lbs)

Raffreddamento ad aria - Air Cooled Unit


Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	78	84	87	90
50°	172	185	192	198
21°	72	78	81	84
70°	159	172	179	185
32°	58	63	66	68
90°	128	139	145	150
38°	48	52	54	56
100°	106	115	119	123

Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	76	81	84	86
50°	168	178	185	190
21°	72	77	80	82
70°	159	170	176	181
32°	68	74	76	78
90°	150	163	168	172
38°	64	70	71	72
100°	141	154	156	159



PANNELLO DI CONTROLLO - CONTROL PANEL



ACCESO POWER ON
DEPOSITO PIENO BIN FULL
ALTA T° CONDENSATORE TOO HI COND.
MANCANZA ACQUA NO WATER
ROTAZIONE ERRATA WRONG ROTATION

DEPOSITO - BIN

20 Kg - 44 lbs

DIMENSIONI - DIMENSIONS

LxPxH(mm): 570 x 600 x 695


WxDxH(in): 22" 7/16 x 24" 10/16 x 27" 6/16

DATI SPEDIZIONE / SHIPPING DATA

LxPxH(mm): 640 x 660 x 870

WxDxH(in): 25" 3/16 x 26" x 34" 4/16

TIPO GHIACCIO - ICE TYPE



PERCENTUALE ACQUA RESIDUA 25%
ICE CONTAINS 25% RESIDUAL WATER

CONDIZIONI USO-OPERATING REQUIREMENTS



220-240V / 50Hz / 1



R134a GWP=1430

MIN

MAX

10°C (50°F)



40°C (104°F)

5°C (41°F)



35°C (95°F)

- 10 %



+ 10 %




1 BAR (14 PSI)



5 BAR (70 PSI)

Calore espulso - Rejected Heat
Volume aria - Air Volume

1014 W
185 m³/h

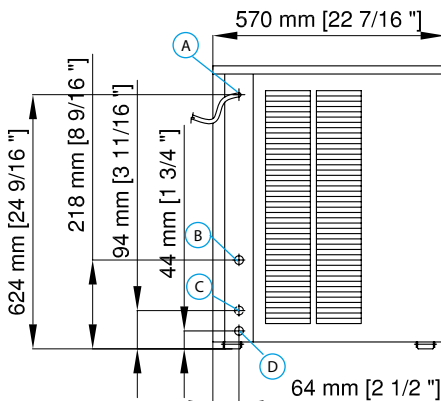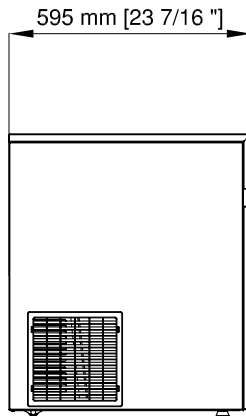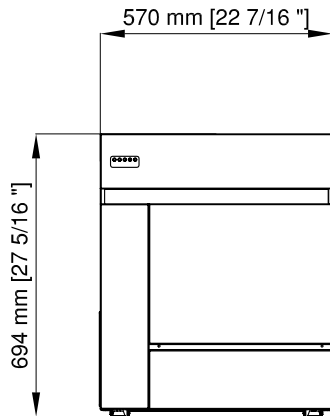

- A** Alimentazione elettrica
Electrical cable supply
- B** Attacco entrata acqua 3/4" gas
Water inlet connection 3/4" gas
- C** Uscita acqua condensazione ad acqua Ø 20 mm
Water outlet connection-Water condensation Ø 20 mm
- D** Attacco scarico acqua
Water drain ø 20 mm