














Dati Tecnici - Specifications

	 cond	 comp. W	 ABS. W	 Fuse	 Kwh/100Kg	 I / h	 kg	 Lbs	 kg	 Lbs	 Ton CO2 equiv.
M132 A		1637	850	10	15.9	7.0	53	117	65	143	1,96
M132 W		1637	750	10	12.1	107.0	53	117	65	143	1,76

24h Produzione Ghiaccio - Ice Production


Raffreddamento ad aria - Air Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	129	147	150	154
50°	284	323	330	340
21°	112	127	133	138
70°	247	281	239	305
32°	96	107	110	113
90°	212	236	242	249
38°	79	87	95	98
100°	173	193	209	215


Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	123	131	134	136
50°	271	289	295	300
21°	111	121	126	128
70°	245	267	278	282
32°	102	110	117	119
90°	225	243	258	262
38°	100	108	115	116
100°	221	238	254	256


Vista frontale
Front view




Vista laterale
Lateral view





Vista superiore
Top view



AIR COOLED





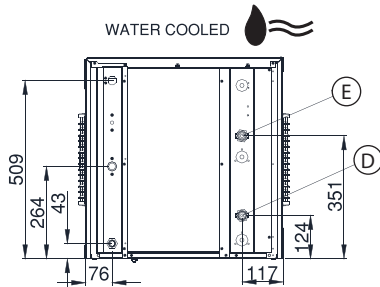



WATER COOLED



- A** Water drain Ø20 mm
- B** Potable water inlet 3/4 GAS
- C** Electrical cable supply
- D** Water cooled inlet 3/4 GAS
- E** Water cooled outlet 3/4 GAS



PANNELLO DI CONTROLLO - CONTROL PANEL

	Alimentazione Powered
	In Funzionamento Operating
	Deposito Pieno/Lavaggio Storage Full / Washing
	Allarme Alarm
	Allarme Alta Pressione High Pressure Alarm
	Pulsante Reset/Lavaggio Button Reset/Washing




DIMENSIONI - DIMENSIONS

LxPxH(mm): 560 x 620 x 575
WxDxH(in): 22" x 24 7/16" x 22 10/16"



DEPOSITO - SLOPE BIN

D105-D155-D205-D255(KM205-255)

TIPO GHIACCIO - ICE TYPE

	HALF-LARGE 10 x 29 x 24 - 6 gr 265 PZ. / CICLO PCS / CYCLE
	DICE 22 x 22 x 24 - 10 gr 168 PZ. / CICLO PCS / CYCLE
	LARGE 29 x 29 x 24 - 17 gr 110 PZ. / CICLO PCS / CYCLE

CONDIZIONI USO-OPERATING REQUIREMENTS

	
220-240V / 1 / 50Hz	R404A GWP=3922
MIN	MAX
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
- 10 %	+ 10 %
1 BAR (14 PSI)	5 BAR (70 PSI)
Calore espulso - Rejected Heat	1731 W
Volume aria - Air Volume	590 m³/h

M132 220 - 240 V 50Hz - Modular Ice Makers