












## Dati Tecnici - Specifications

											
	cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	kg	Lbs	kg	Lbs	Ton CO2 equiv.
M202 A		2348	1100	16	14.8	12	70	154	85	187	2,75
M202 W		2348	1000	16	10.6	128	70	154	85	187	1,96

## 24h Produzione Ghiaccio - Ice Production


### Raffreddamento ad aria - Air Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	<b>185</b>	<b>215</b>	<b>230</b>	<b>240</b>
50°	408	474	507	529
21°	<b>175</b>	<b>200</b>	<b>215</b>	<b>220</b>
70°	386	441	474	485
32°	<b>135</b>	<b>155</b>	<b>160</b>	<b>165</b>
90°	298	342	353	365
38°	<b>120</b>	<b>133</b>	<b>138</b>	<b>140</b>
100°	265	293	302	309


### Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	<b>175</b>	<b>200</b>	<b>215</b>	<b>220</b>
50°	386	441	474	485
21°	<b>170</b>	<b>195</b>	<b>210</b>	<b>215</b>
70°	375	430	463	474
32°	<b>160</b>	<b>185</b>	<b>192</b>	<b>197</b>
90°	353	408	423	434
38°	<b>155</b>	<b>180</b>	<b>185</b>	<b>190</b>
100°	342	397	408	419


Vista frontale  
Front view




Vista laterale  
Lateral view





Vista superiore  
Top view



AIR COOLED 

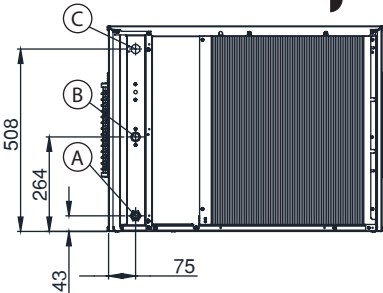



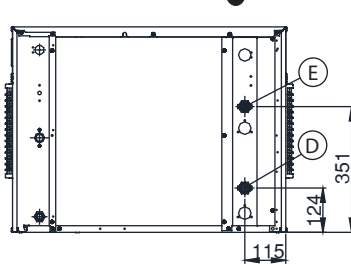



WATER COOLED 



- A** Water drain Ø20 mm
- B** Potable water inlet 3/4 GAS
- C** Electrical cable supply
- D** Water cooled inlet 3/4 GAS
- E** Water cooled outlet 3/4 GAS



### PANNELLO DI CONTROLLO - CONTROL PANEL

	Alimentazione Powered
	In Funzionamento Operating
	Deposito Pieno/Lavaggio Storage Full / Washing
	Allarme Alarm
	Allarme Alta Pressione High Pressure Alarm
	Pulsante Reset/Lavaggio Button Reset/Washing


### DIMENSIONI - DIMENSIONS

LxPxH(mm): 760 x 620 x 575  
WxDxH(in):2915/16"x247/16"x2210/16"

### DEPOSITO - SLOPE BIN

D205 - D255 - D305 (KM305)  
D405 (KFM404)-D505 (KFM505)


### TIPO GHIACCIO - ICE TYPE



**HALF-LARGE**  
10 x 29 x 24 - 6 gr

**370**


PZ. / CICLO PCS / CYCLE



**DICE**  
22 x 22 x 24 - 10 gr

**234**

PZ. / CICLO PCS / CYCLE



**LARGE**  
29 x 29 x 24 - 17 gr

**140**

PZ. / CICLO PCS / CYCLE

### CONDIZIONI USO-OPERATING REQUIREMENTS



220-240V / 1 / 50HZ R404A GWP=3922

MIN	MAX
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
- 10 %	+ 10 %
1 BAR (14 PSI)	5 BAR (70 PSI)

Calore espulso - Rejected Heat **2432 W**  
Volume aria - Air Volume **590 m³/h**