

## Dati Tecnici - Specifications


cond	comp. W	ABS. W	Fuse	Kwh/100Kg	I/ h	kg	Lbs	kg	Lbs	Ton CO2 equiv.	
<b>M205 ECO A</b>		2843	1100	16	13.8	12	70	154	80	176	0,00

## 24h Produzione Ghiaccio - Ice Production



### Raffreddamento ad aria - Air Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	<b>172</b>	<b>200</b>	<b>214</b>	<b>220</b>
50°	379	441	472	485
21°	<b>163</b>	<b>186</b>	<b>200</b>	<b>205</b>
70°	359	410	441	451
32°	<b>131</b>	<b>150</b>	<b>155</b>	<b>160</b>
90°	289	331	342	353
38°	<b>116</b>	<b>129</b>	<b>133</b>	<b>136</b>
100°	257	284	293	299

Vista frontale  
Front view



Vista laterale  
Lateral view

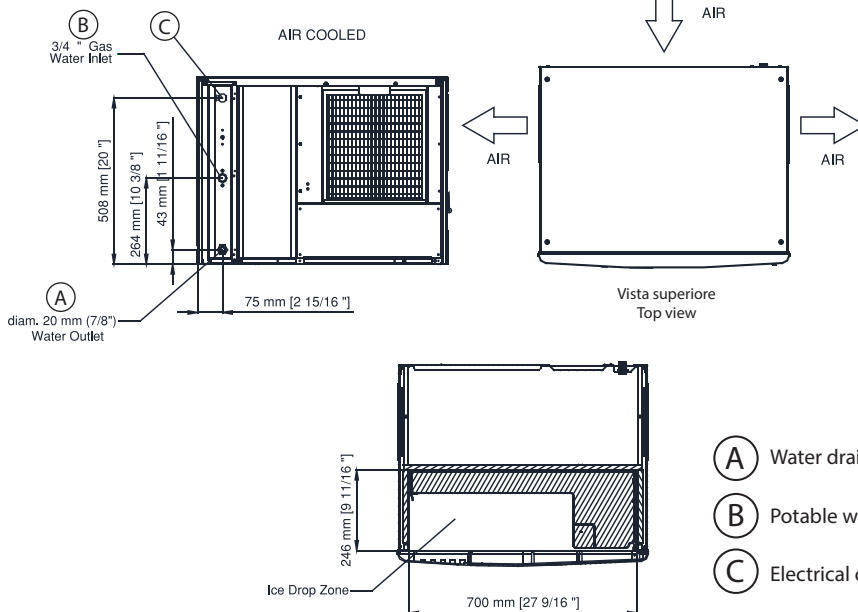

- (A) Water drain ø 20 mm
- (B) Potable water inlet 3/4 GAS
- (C) Electrical cable supply



### PANNELLO DI CONTROLLO - CONTROL PANEL

	Alimentazione Powered
	In Funzionamento Operating
	Deposito Pieno/Lavaggio Storage Full / Washing
	Allarme Alarm
	Allarme Alta Pressione High Pressure Alarm
	Pulsante Reset/Lavaggio Button Reset/Washing


### DIMENSIONI - DIMENSIONS

LxPxH(mm): 760 x 620 x 575  
WxDxH(in): 29.15/16" x 24.7/16" x 22.10/16"

### DEPOSITO - SLOPE BIN

D205 - D255 (KM205-255) - D305


### TIPO GHIACCIO - ICE TYPE



**HALF-LARGE**  
10 x 29 x 24 - 6 gr

**370**


PZ. / CICLO PCS / CYCLE



**DICE**  
22 x 22 x 24 - 10 gr

**234**

PZ. / CICLO PCS / CYCLE



**LARGE**  
29 x 29 x 24 - 17 gr

**140**

PZ. / CICLO PCS / CYCLE

### CONDIZIONI USO-OPERATING REQUIREMENTS



220-240V / 1 / 50HZ

R290 GWP=3,3

MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 BAR (14 PSI)		5 BAR (70 PSI)